



पाणिनी गाउँपालिका

Panini Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office of the Rural Municipal Executive

दुर्गाफाँट, अर्घाखाँची
Durgaphant, Arghakhanchi
लुम्बिनी प्रदेश, नेपाल
Lumbini Province, Nepal

पत्र सङ्ख्या/Letter No.: २०८२/०८३

चलानी नं./Ref.No.:



मिति: २०८३/०१/२२


ने.सं. ११४६ बछलागा: ३, मंगलबार

कोटेशन पेस गर्ने सम्बन्धी सूचना !

पाणिनी गाउँपालिकाको आ.व. २०८२/०८३ को वार्षिक स्वीकृत विकास कार्यक्रमबमोजिम यस गाउँपालिकाको वडा नं. ५ स्थित ढोरपाटन मोटरबाटो देखि वडा कार्यालय जाने बाटो ढलान गर्ने र पाणिनी ०५ भानु मा.वि. खेल मैदान निर्माण गर्नु पर्ने भएकाले यस कार्यालयमा सूचीकृत/नवीकरण भएका फर्महरुबाट सूचना प्रकाशन भएको मितिले ७ (सात) दिन भित्र आवश्यक कागजातसहित कोटेशन (BOQ) पेस गर्नुहुन सम्बन्धित सबैको जानकारीका लागि यो सूचना प्रकाशन गरिएको छ । साथै उक्त कार्यको BOQ यसै साथ संलग्न रहेको छ ।

(सुवर्ण खनाल)

प्रमुख प्रशासकीय अधिकृत

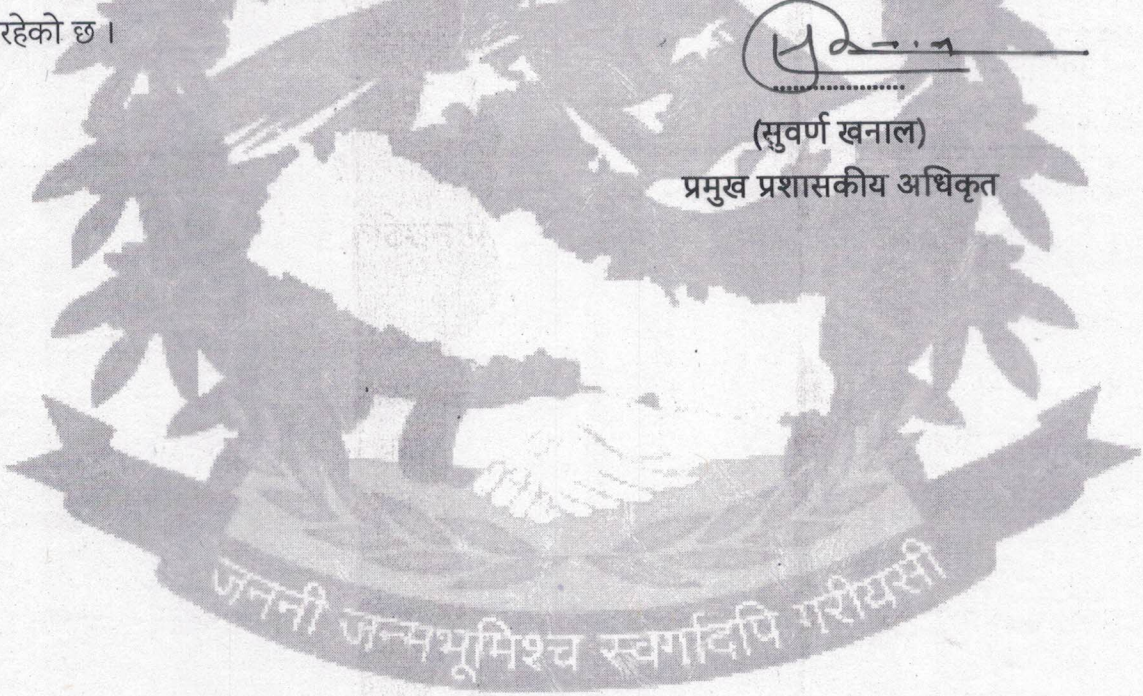



पाणिनी गाउँपालिका
गाउँपालिकाको कार्यालय
दुर्गाफाँट, अर्घाखाँची
बिल अफ क्वान्टिटि (BoQ)



आ.व. २०८२/०८३

कार्यक्रम :

योजनाको नाम :
स्थान :

ढोरपाटन मोटरबाटो देखि वडा कार्यालय जाने बाटो ढलान गर्ने कार्य र पाणिनी ०५ भानु मा.बि खेल मैदान निर्माण
पाणिनी गाउँपालिका

S.N	Iteam	Unit	Quantity	Rate	Amount	Remarks
१	Clearing Grass and Removal of Rubbish and Dressing and levelling the construction surface Clearing grass/ top soil and removal up to a distance of 50 meters outside the periphery of the area , including cutting and filling of small undulation. By using Machine	sqm	237.00			
२	Road way Excavation Using Machine in all types of soil as per Drawing and technical specifications including removal of stumps and other deleterious matter, all lifts and lead as per Drawing and instruction of the Engineer.	cum	2423.70			
३	Providing and laying of hand pack Stone soling with 150 to '200 mm thick stones and packing with smaller stone on prepared surface as per Drawing and Technical Specifications. Stone Locally Available	cum	27.01			
४	Providing and laying of Plain Cement Concrete/Reinforced Cement Concrete M 15 (or 1:2:4 for nominal mix) in Foundation complete as per Drawing and Technical Specifications. (sand,aggregate-river/quarry, cement-PPC)	cum	28.44			



Handwritten signature and date: 10/11/2019

S.N	Item	Unit	Quantity	Rate	Amount	Remarks
4	Providing and laying plum concrete Using Machine (boulder mix concrete) as per drawing and specification '60% M15 concrete and 40% boulder stone with curing, formworks all complete. (sand, aggregate-river/quarry, cement-Ppc)	cum	15.40			
5	Making plywood formwork including supply and selection of materials fixing, nailing according to drawing, placing separators, dismantling forms and hauling upto 30m distance. Column	sqm	18.96			
			Total Amount			
			(VAT) @ 13%			
			Total Amount Including Vat			
			Contingency @3%			
			Total Estimate Amount			