



पाणिनी गाउँपालिका

Panini Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office of the Rural Municipal Executive

दुर्गाफाँट, अर्घाखाँची

Durgaphant, Arghakhanchi

लुम्बिनी प्रदेश, नेपाल

Lumbini Province, Nepal

पत्र सङ्ख्या/Letter No.: २०८२/०८३

चलानी नं./Ref.No.:




कोटेशन पेस गर्ने सम्बन्धी सूचना !

(दोस्रो पटक प्रकाशन मिति: २०८३/०१/३१)

पाणिनी गाउँपालिकाको आ.व. २०८२/०८३ को वार्षिक स्वीकृत विकास कार्यक्रमबमोजिम यस गाउँपालिकाको वडा नं. ६ स्थित वडा कार्यालयको अधुरो कार्य निर्माण गर्न यस कार्यालयबाट मिति २०८३/०१/२४ गते कोटेशन पेस गर्ने सूचना प्रकाशन गरिएकोमा निर्धारित समायवधिभित्र कुनै पनि फर्मबाट कोटेशन पेस नभएकाले पुनः कोटेशन पेस गर्ने यस कार्यालयको निर्णयानुसार उल्लिखित कार्यका लागि इच्छुक फर्महरूले ७ (सात) दिन भित्र आवश्यक कागजातसहित कोटेशन (BOQ) पेस गर्नुहुन सम्बन्धित सबैको जानकारीका लागि यो सूचना प्रकाशन गरिएको छ । साथै उक्त कार्यको BOQ यसै साथ संलग्न रहेको छ ।

(सुवर्ण खनाल)

प्रमुख प्रशासकीय अधिकृत

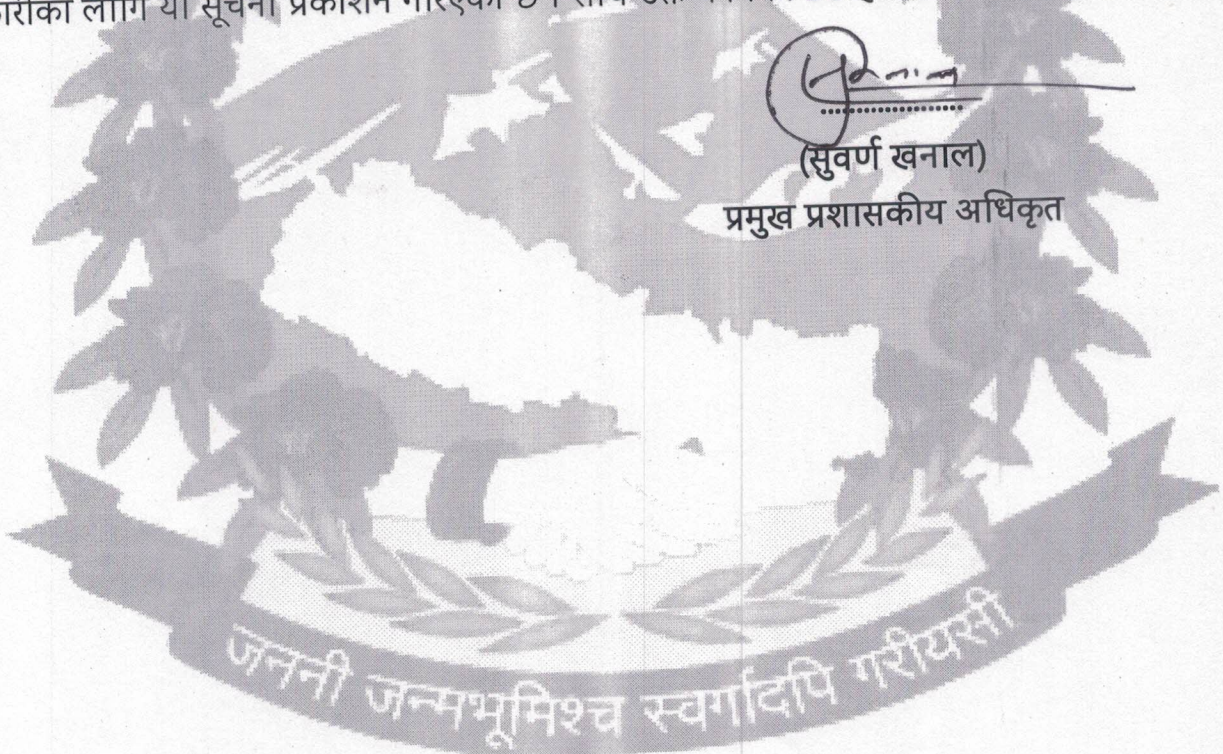



पाणिनी गाउँपालिका
गाउँपालिकाको कार्यालय
दुर्गाफाँट, अर्घाखाँची

बिल अफ क्वान्टि (BoQ)

कार्याक्रम :

यातयात पूर्वाधार

पोजनाको नाम

वडा कार्यालयको अधुरो कार्य निर्माण

थान:

पाणिनी गाउँपालिका वडा नं. ६



महोदय
पाणिनी गाउँपालिका
दुर्गाफाँट, अर्घाखाँची

आ.व. २०८२/०८३

क्र.सं	कामको विवरण	परिमाण	इकाई	दर रेट अंकमा	दर रेट अक्षरमा	मूल्य	कैफियत
	Roadway Excavation in all types of soil as per drawing and technical specification, including removal of stumps and other deleterious matter, with all lifts and lead as per Drawing and instruction of the Engineer. Manually	9.37	Cum				
	Providing and laying of hand pack Stone soling with 150 to 200 mm thick stones and packing with smaller stone on prepared surface as per Drawing and Technical Specifications. Stone Locally Available	0.62	Cum				

			
			
<p>Cement concrete work M10 (1:3:6) in foundation, wall including collection of materials and a lead of 30m in (Manual) (sand, aggregate-river/quarry, cement-Pcc)</p>		0.62 Cum	
<p>Stone (rubble) masonry work upto 5 m height including collection of hard block stones, preparation of cement mortar (1:4) including weep hole of 4inch pipe per square meter, pointing works and a lead of 10 m.</p>		4.69 Cum	
<p>Machine made brick masonry works along with supplying bricks making cement sand mortar and construction of brick wall including haulage distance upto 30m (First Class Brick Work with 1:4 Cement sand mortar)</p>		2.37 Cum	
<p>12.5 mm thick cement plaster in wall Cement sand Mortar (1:4) (sand-crusher, cement-Opc)</p>		57.28 Sqm	

Providing and laying ,
fitting and placing un-
coated Mild steel / HYSD
reinforcement complete in
foundation as per drawing
and technical specification

77.93 KG

Cement concrete work
M15 (1:2:4) in foundation,
wall including collection of
materials and a lead of
30m in (Manual)
(sand, aggregate-
river/quarry, cement-Pcc)

1.96 Cum

Porcelaine glazed tiles
work for wall in 1:4 c/m
with finishing (sand-
crusher, cement opc,and
use white cement in filler)

4.44 Sqm

Sanitary item

UPVC Door/ Windows

Door Frame (80/50mm),
door frame 112/42 mm
door sash 80*200mm
panel

29.05
प्रति ब.
फि.

Handwritten signature and stamp in the top right corner.



Sliding Windows Frame (80/50mm), Sliding window sash (38/62mm) with net all complete	8.72	प्रति फि.			
पोलिथिन पानी त्याङ्क साधारण	500.00	प्रति लिटर			
प्यान पोसिलिन ग्लेज्ड 16" x 22"	1.00	प्रति सेट			
वास बेसिन - १२"x १८"	2.00	प्रति सेट			
Other Sanitary & Electrical item	1.00	ल.स			
भ्याट रकम @13%					
जम्मा अङ्क भ्याट सहित					

फर्मको नाम:
ठेगाना:

दस्तखतः