



पाणिनी गाउँपालिका

Panini Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office of the Rural Municipal Executive

पत्र सङ्ख्या/Letter No.: २०८२/०८३

चलानी नं./Ref.No.:



दुर्गाफाँट, अर्घाखाँची

Durgaphant, Arghakhanchi

लुम्बिनी प्रदेश, नेपाल

Lumbini Province, Nepal

मिति:- २०८३/०१/२५


ने.सं. ११४६ बछलागा: ६, शुक्रबार

कोटेशन पेस गर्ने सम्बन्धी सूचना !

पाणिनी गाउँपालिकाको आ.व. २०८२/०८३ को वार्षिक स्वीकृत विकास कार्यक्रमबमोजिम यस गाउँपालिकाको वडा नं. ८ स्थित वेंगादी ववियार मो बा, भानु आ. वि (मधुलेख) जाने बाटो र कमला मा वि मोटर बाटो ढलाई गर्नु पर्ने भएकाले यस कार्यालयमा सूचीकृत/नवीकरण भएका फर्महरूबाट सूचना प्रकाशन भएको मितिले ७ (सात) दिन भित्र आवश्यक कागजातसहित कोटेशन (BOQ) पेस गर्नुहुन सम्बन्धित सबैको जानकारीका लागि यो सूचना प्रकाशन गरिएको छ । साथै उक्त कार्यको BOQ यसै साथ संलग्न रहेको छ ।

(सुवर्ण खनाल)

प्रमुख प्रशासकीय अधिकृत

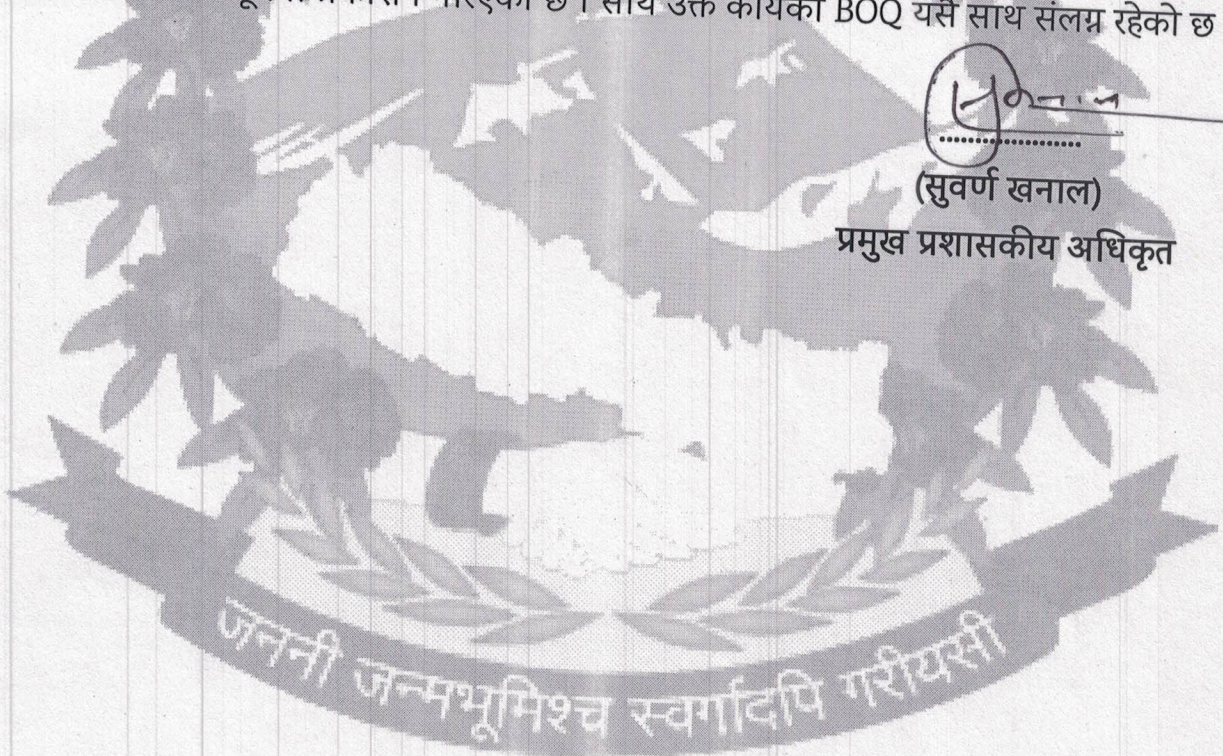

जननी जन्मभूमिश्च स्वर्गादपि गरीयसी



पाणिनी गाउँपालिका
गाउँपालिकाको कार्यालय
दुर्गाकाँट, अर्घाखाँची
बिल अफ कान्ट्रि (BOQ)

आ.व. २०८२/०८३

कार्यक्रम : पालिका स्तरीय योजना
योजनाको नाम : वेंगादी वरियार मो बा, भानु आ. वि (सधुलेख) जाने बाटो र कमला मा वि चौक देखि कमला मा बि मोटर बाटो ढलाई
स्थान: पाणिनी गाउँपालिका ८

प्रमुख प्रशासकीय अधिकृत

क्र.सं.	कामको विवरण	इकाई	परिमाण	दर रेट अंकमा	दर रेट अक्षरमा	मूल्य	कैफियत
A	Civil Work						
1	IN OPEN WAY EXCAVATION USING MACHINERY FOR TYPES OF SOIL AS PER DRAWING AND TECHNICAL SPECIFICATIONS INCLUDING REMOVAL OF STUMPS AND OTHER DELETERIOUS MATTER, ALL LIFTS AND LEAD AS PER DRAWING AND	Cum	1913.55				
2	Providing and laying plum concrete (boulder mix concrete) as per drawing and specification '60% M15 concrete and 40% boulder stone Manually Mixed	Cum	3.85				
3	Earth work in excavation of foundation of structures in Ordinary Rock not required blasting including construction of shoring and bracing, removal of stumps and other deleterious matter and backfilling with approved Material as per Drawing and Technical Specifications. Manually	Cum	40.00				
4	Providing and laying of hand pack Stone soling with 150 to 200 mm thick stones and packing with smaller stone on prepared surface as per Drawing and Technical Specifications. Stone Locally Available	Cum	16.93				

5	Providing and laying of Plain Cement Concrete/Reinforced Cement Concrete M 15 (or 1:2:4 for nominal mix) in Foundation complete as per Drawing and Technical Specifications. (sand, aggregate-river/quarry, cement-Pcc)	Cum	49.50			
6	Making plywood formwork including supply and selection of materials fixing, nailing according to drawing, placing separators, dismantling forms and hauling upto 30m distance.	Sqm	18.00			
SUB-TOTAL AMOUNT (B)						
VAT @13%						
Total Estimated Amount Including VAT						


 प्रमुख प्रशासकीय अधिकारी


 पाठन शैक्षणिक आदर्शालय
 इलाहाबाद, उ.प्र.
 मुद्रित प्रकाशक

फर्मको नाम:

मिति :

दस्ताखत: